


Double Pitch Roller Chain Style "C" - with Large Roller and Straight Plates

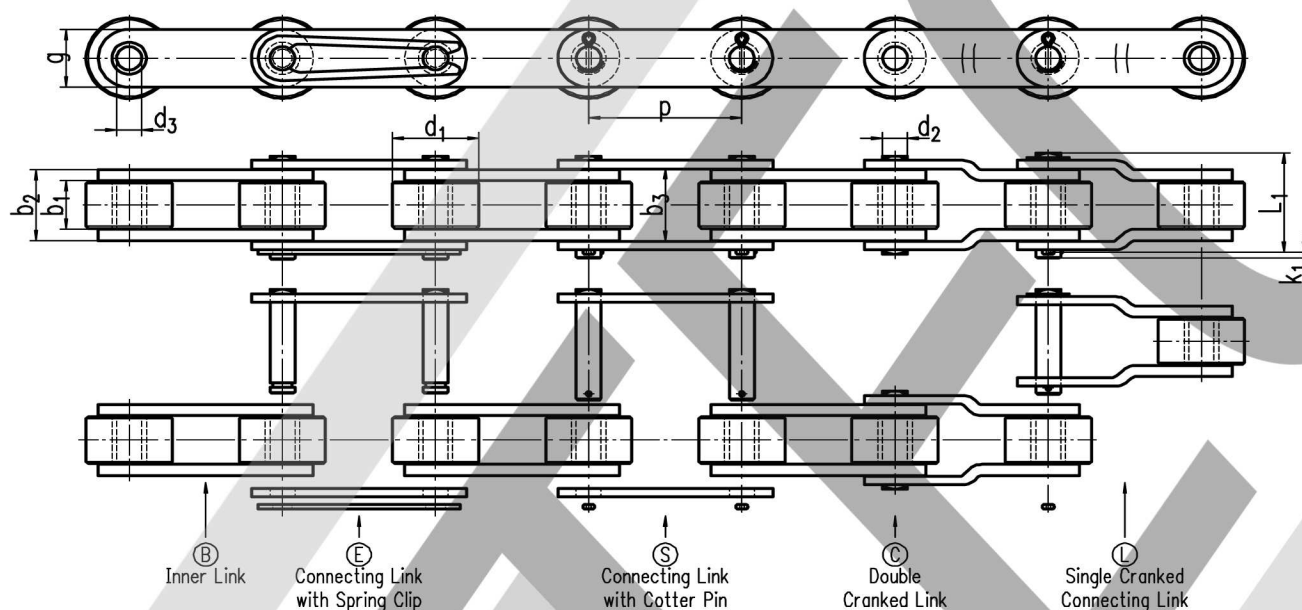

DIN	p	b ₁ min.	b ₂ max.	b ₃ min.	d ₁ max.	d ₂ max.	d ₃ min.	g max.	K ₁ max.	L ₁ max.	Breaking Load [N]	Weight kg/m
C2042	25,4	7,85	11,15	11,28	15,88	3,96	4,01	12	3,9	17,8	14.100	0,84
C2042H	NON STANDARD											
C2052	31,75	9,4	13,8	13,93	19,05	5,08	5,13	15	4,1	21,8	22.200	1,27
C2052H	NON STANDARD											
C2062	38,1	12,57	17,7	17,85	22,23	5,94	5,99	18	4,6	26,9	31.800	1,61
C2062H	38,1	12,57	18,7	-	22,23	5,94	5,99	18	3	29	38.000	2,07
C2082	50,8	15,75	22,5	22,7	28,58	7,92	7,98	24,1	5,4	33,5	56.700	3,12
C2082H	50,8	15,75	23,9	-	28,58	7,92	7,98	24,1	3	36,5	66.000	3,58
C2102	63,5	18,9	27,4	27,6	39,67	9,53	9,59	30,1	6,1	41,1	88.500	4,83
C2102H	63,5	18,9	29	-	39,67	9,53	9,59	30,1	3,5	44	109.000	5,38
C2122	76,2	25,22	35,3	35,6	44,45	11,1	11,17	36,2	6,6	50,8	127.000	7,66
C2122H	76,2	25,22	37,4	-	44,45	11,1	11,17	36,2	3,6	53,8	154.000	8,26